




# HH1265547 [Bridgelux LED Hi-Lo Beam Grille Mounted Light, 3200 Lumens]

Instruction Guide

## For Machines Equipped with Hi-Lo Beam Lights:

1. Remove the original bulb from the machine by removing four screws in the corners of the rubber grommet that holds the light in place. Remove electrical connectors from the bulb. Remove the bulb from the rubber grommet
2. Install electrical connector (supplied) to the wires on the machine, noting which wire is high beam, which is low beam, and which is ground
3. Place the light into the rubber grommet and install onto machine using 4 original screws. Be sure that wiring does not interfere with cooling fan

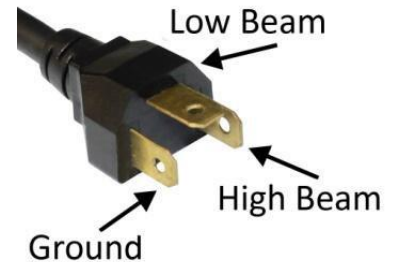

## For Machines Equipped with Single Beam Flood Lights:

1. Remove the original bulb from the machine by removing four screws in the corners of the rubber grommet that holds the light in place, then remove electrical connectors from the bulb. Remove the bulb from the rubber grommet
2. Install new electrical connector (supplied) to the wires on the machine, noting which wire is the power feed and which is the ground
3. This light is created as a hi-lo beam light and it can be installed as either option – high or low beam. Install the remaining end of the connector to the Hy-Cap light, being sure to match the wire positions to that of the other end of the connector. You may need to shorten the wires to prevent them from making contact with the cooling fan when installed (see light wiring)
4. Hy-Capacity has included a three-wire connector so that the unused wire can be safely included in the connector, preventing the chance of a short circuit
5. Place the light into the rubber grommet and install onto machine using four original screws. Be sure that wiring does not interfere with cooling fan

