




## HR65223 [Bridgelux LED Hi-Lo Beam Inner Hood Light, 3200 Lumens]

Instruction Guide

1. Remove original light and wiring connector
2. Attach electrical connector to machine wires. Be sure to place wires into correct positions to match connections on light

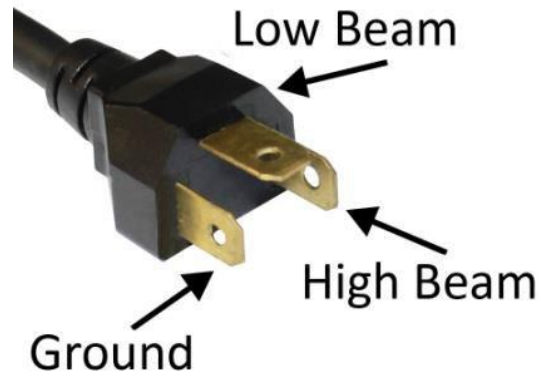

The machine is wired to operate a single beam flood light in this application. The Hy-Cap light can be wired as high or low beam. Be sure to place the hot lead to the terminal for the beam you prefer

